



LIMPID LIGHTS

collection 2015

Do we understand what happens when we dim our lights? How can we include dimming as a part of the design? These are some of the questions that triggered the design of Exploded View, a series of lighting objects that incorporate movement as a key element of its design.

By moving the light-source away from, or closer to the lighting object, the intensity of the light can be adapted. After all, the sun never fades; it is the earth that moves closer and further away, causing the light to reflect, change colour, dim or die.



Left to right
Limpid Light - M, S, L



LIMPID LIGHT S

Light Source	Led 12 W 2700 K 1200 lm CRI 80
Product use	Indoor
Dimensions	166 x 166 x 385 mm (l x w x h)
Materials	Shade in glass (The glass is mouth blown and therefor can contain airbubbles). Adjustable suspension in steel and brass. Non adjustable suspension in steel.

Finish



clear glass
sandblasted



smoked glass
sandblasted

* with fingerprint protective finish

Versions	Standard	Fixed suspension
	Full Swing	Adjustable suspension

LED Driver	Meanwell PCD-16-350B		
	200-240 VAC	0.20 A	50/60 Hz
	277 VAC	0.15 A	50/60 Hz
	Max. 40 W		
	Tronic dimmable, casambi dimmer suggested		




Package	Full Swing	Standard
	1 BOX 415 x 415 x 565 mm	1 BOX 415 x 290 x 785 mm
	Gross weight 3.9 kg	Gross weight 5.6 kg
	Net weight 2.9 kg	Net weight 4.6 kg




LIMPID LIGHT M

Light Source	Led 12 W 2700 K 1200 lm CRI 80
Product use	Indoor
Dimensions	340 x 340 x 360 mm (l x w x h)
Materials	Shade in glass (The glass is mouth blown and therefor can contain airbubbles). Adjustable suspension in steel and brass. Non adjustable suspension in steel.

Finish






clear glass
sandblasted




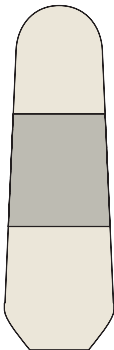


smoked glass
sandblasted

* with fingerprint protective finish

Versions	Standard	Fixed suspension	
	Full Swing	Adjustable suspension	
LED Driver	Meanwell PCD-16-350B		
	200-240 VAC	0.20 A	50/60 Hz
	277 VAC	0.15 A	50/60 Hz
	Max. 40 W		
	Tronic dimmable, casambi dimmer suggested		
	<div>  </div>		
Package	Full Swing	Standard	
	1 BOX 415 x 415 x 565 mm	1 BOX 415 x 290 x 785 mm	
	Gross weight 5.6 kg	Gross weight 5.6 kg	
	Net weight 4.6 kg	Net weight 4.6 kg	




LIMPID LIGHT L

Light Source	Led 12 W 2700 K 1200 lm CRI 80	
Product use	Indoor	
Dimensions	200 x 200 x 600 mm (l x w x h)	
Materials	Shade in glass (The glass is mouth blown and therefor can contain airbubbles). Adjustable suspension in steel and brass. Non adjustable suspension in steel.	
Finish	<div><div></div><div>clear glass sandblasted</div></div> <div><div></div><div>smoked glass sandblasted</div></div> <p>* with fingerprint protective finish</p>	
Versions	Standard Full Swing	Fixed suspension Adjustable suspension
LED Driver	Meanwell PCD-16-350B <div><div> </div> /AC 0.20 A 50/60 Hz 277 VAC 0.15 A 50/60 Hz Max. 40 W Tronic dimmable, casambi dimmer suggested</div>	
Package	Full Swing 1 BOX 415 x 290 x 785 mm Gross weight 6.5 kg Net weight 5.5 kg	Standard 1 BOX 415 x 290 x 785 mm Gross weight 5.6 kg Net weight 4.6 kg


Standard

12,5 x 4,5 cm



Full swing

12 x 8,5 cm



Versions


Limpid Light

Coating: Mat black *white on request

Please note: This light needs to be dimmed (tronic dimmable).

Dimmer is not included, we suggest the casambi dimmer + € 70,-



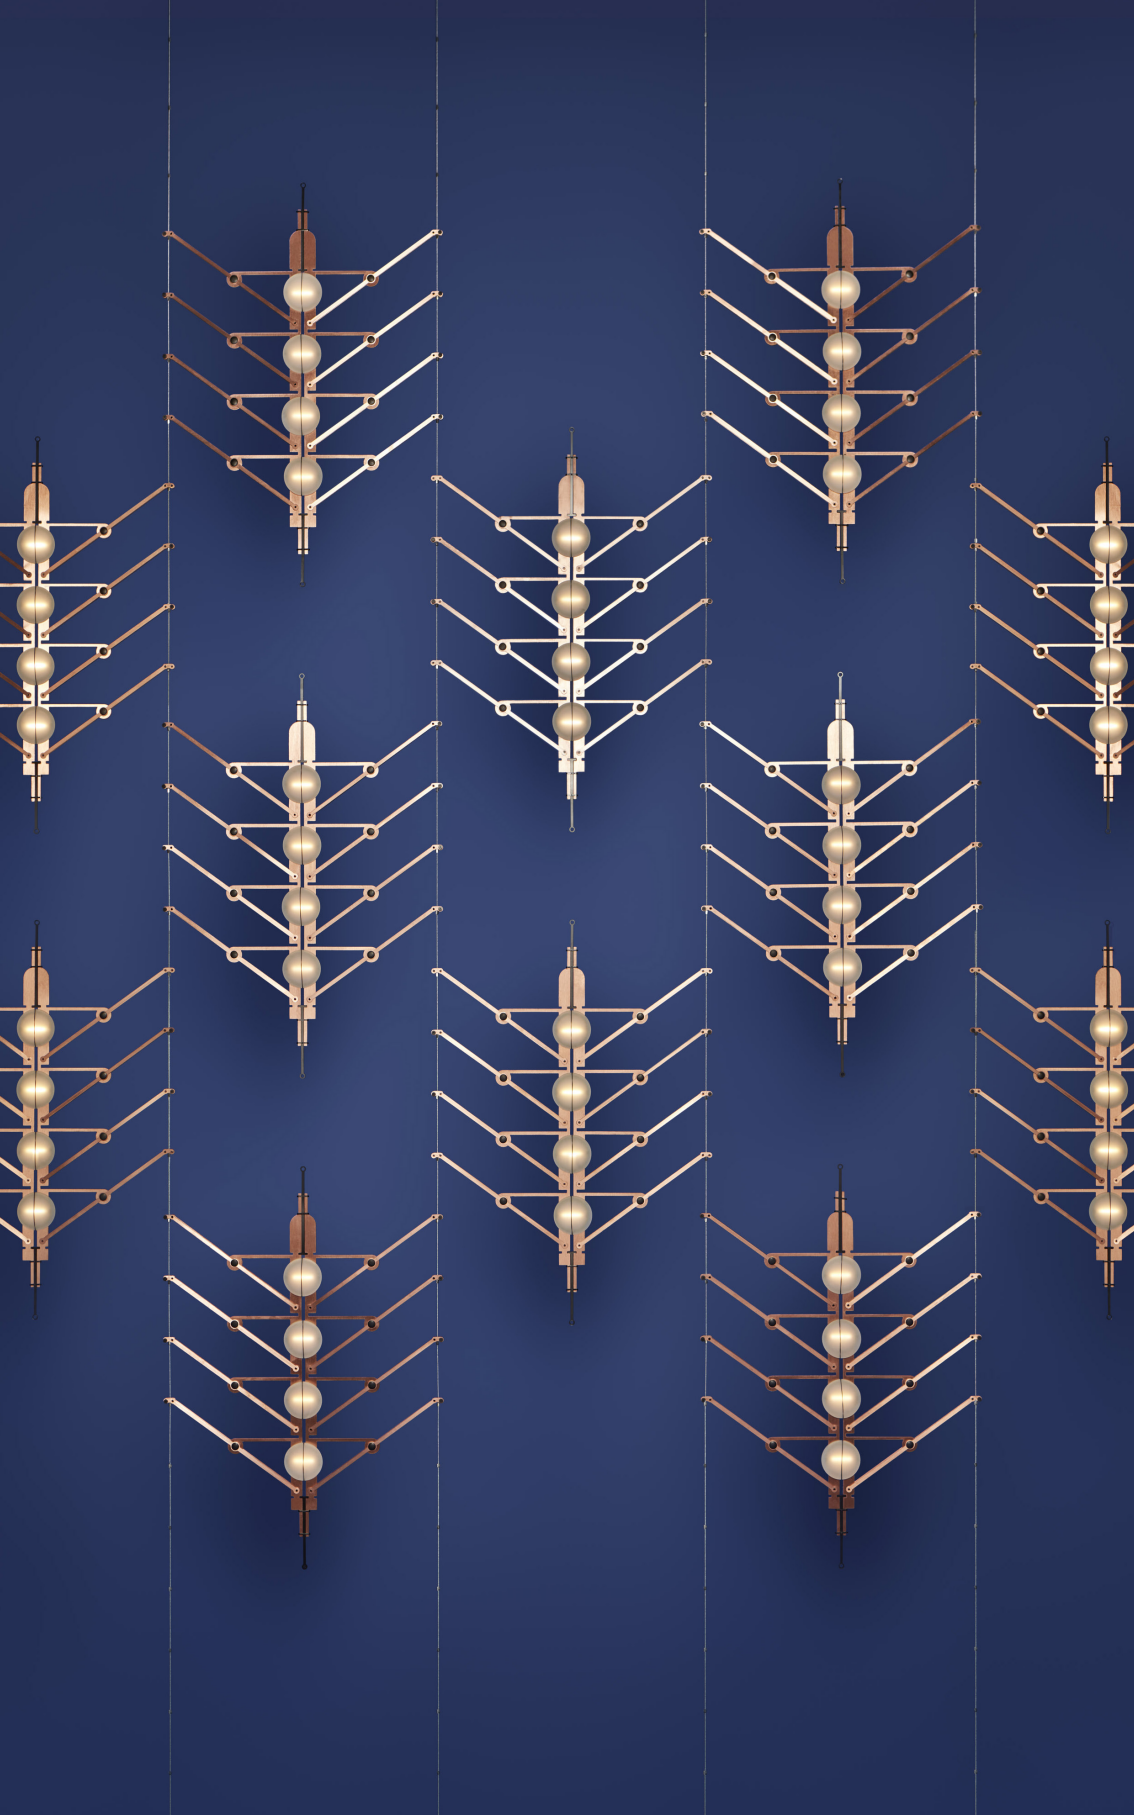


V-V-V


adopted by DCW editions

For Dutch duo VANTOT, it's all in the name. Literally translated from Dutch to mean 'from to', VANTOT focuses on the entire process, starting with a technique and ending with the product. The pair strives to find new applications for innovations in everyday life, and it's not only new-found technologies which have seized their interest. Serving as a guiding light in the duo's work, antiquated techniques are put to good use in modern day outlets, mutually benefiting from today's updated knowledge base.

Take electricity. Although light bulbs have been around for centuries, innovations – such as the rise of the LEDs – have made continuous evolution possible. And today, electronic devices operate on much lower voltages than ever before, significantly decreasing its hazardous aspects. While direct contact with electricity – and light – used to be a no go, recent developments illuminate completely new realms for the old technology.

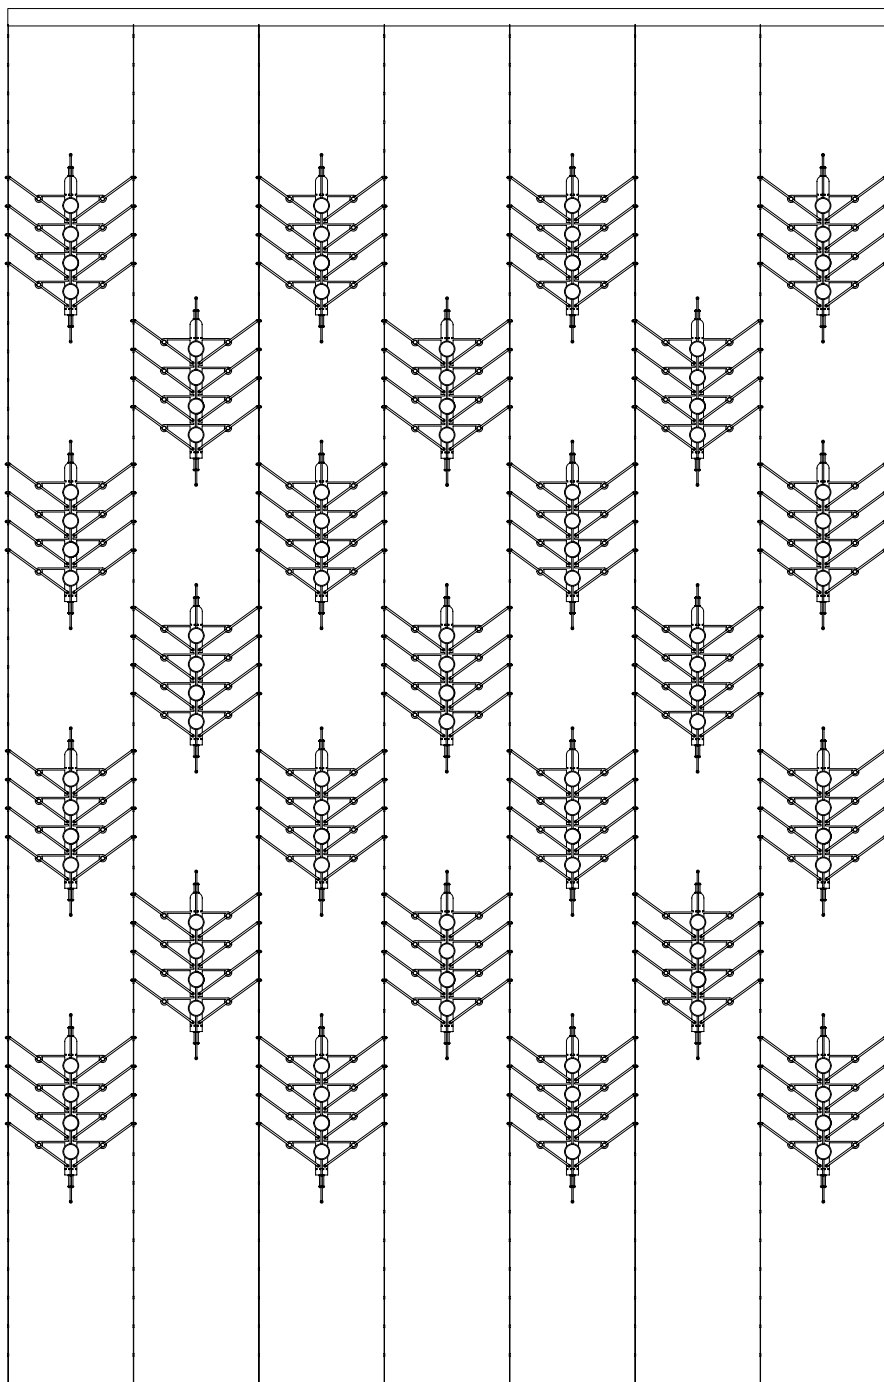

de Vantot



FICHE TECHNIQUE TECHNICAL SHEET



SUSPENSION

PENDANT LAMP

Matériaux Material	Aluminium anodisé Anodized aluminum	Maximum watt Watt max	2W (8 x 0,25W)	Efficacité Efficiency	100 Lm/W
Poids Weight	0,2 kg	Tension Voltage	100- 240V	Gradable Dimmable	TRIAC
Dimensions Main dimensions	570 x 355 x 20 mm	IP IP	20	Autonomie Autonomy	7 heures 7 hours
Dimensions emballage Packaging dimensions	440 x 645 x 75 mm	Durée de vie LED Lifespan of LED	> 50 000 heures > 50 000 hours	Driver Driver	12V 60W
Classe Class	1	Température de couleur Color Temperature	2700 K	IRC CRI	85
Type d'ampoule Bulb type	LED intégrée LED integrated	Lumens Lumens	200 Lm		

FINITIONS



Silver
Argent

SIL

FINISHES




Gold
Or

GOL

DCWéditions
PARIS


71 rue de la Fontaine au Roi
75011 Paris—France
+33 (0)1 40 21 37 60
sales@dcwe.fr

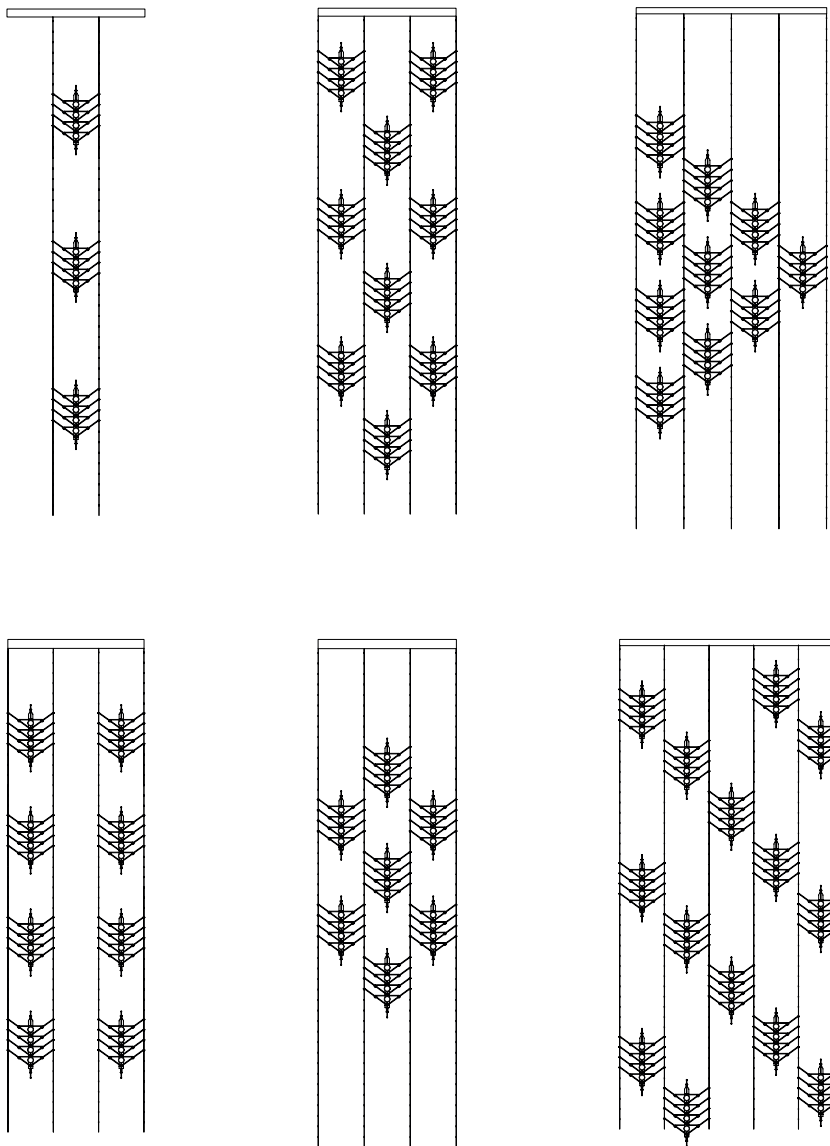

Compositions

V-V-V


V-V-V gives you endless possibilities in compositions. Choose the number of modules and suspension wires to your wishes and vary in shapes and sizes. Also it is possible to add modules and wires to your collection in a later stage due to the modular railsystem.

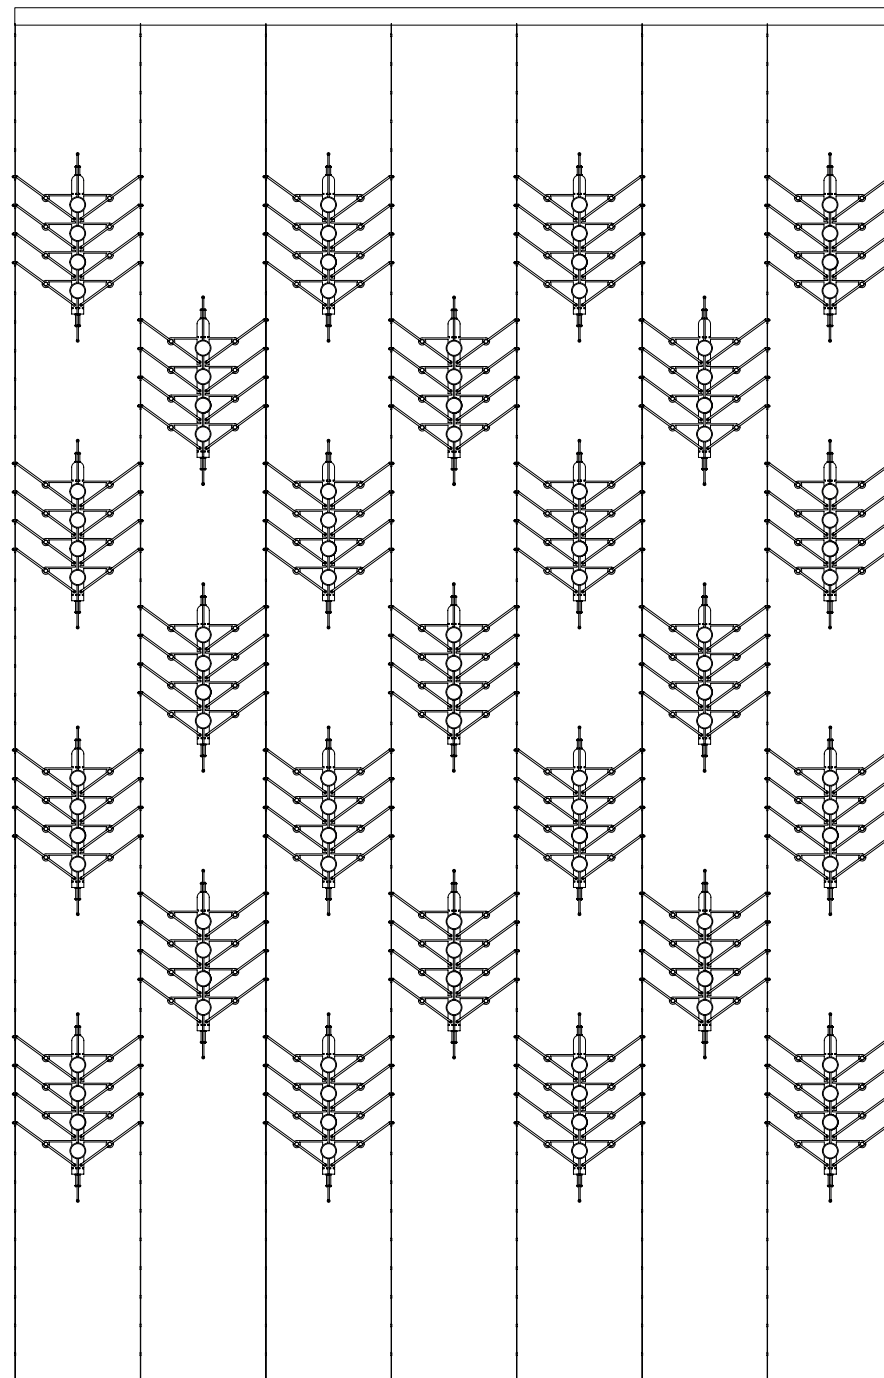

Feather


collection CURRENT CURRENTs

While it opens up a world of design opportunities, LED requires a different approach than conventional lighting. Compared to traditional fixtures, the focused and dense light of LED calls for multiple light sources instead of one. Current Currents challenges the idea of traditional lighting and rediscovers the role of light in our interior.

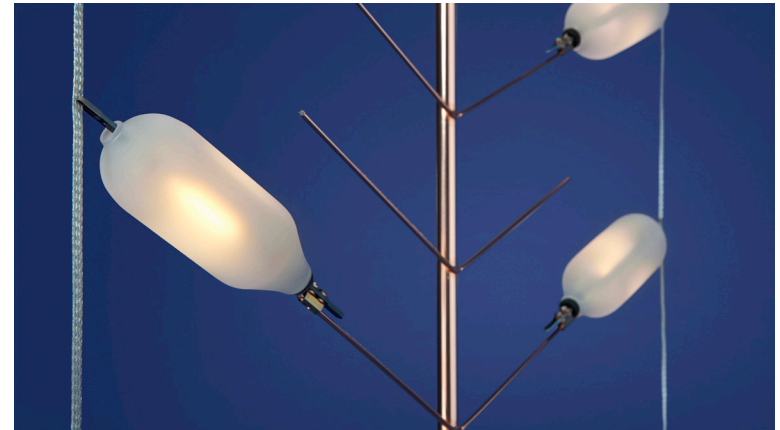




< Feather
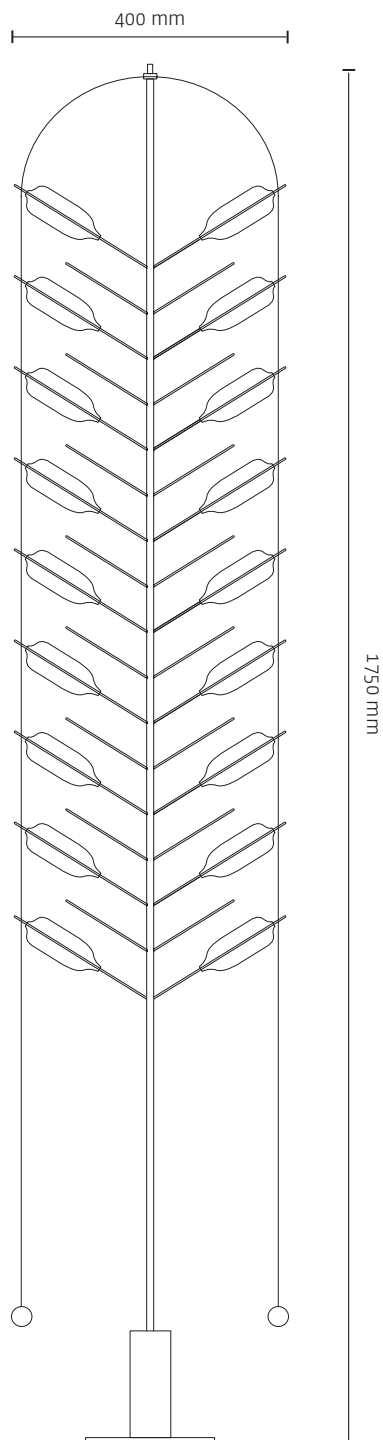
> Feather *detail*



FEATHER


Light Source	Led 12 W		
*every bulb	2700 K		
	1200 lm		
	CRI 80		
Product use	Indoor		
Dimensions	200 x 400 x 1750 mm (l x w x h)		
Versions	Large		
Materials	Copper-plated metal & sandblasted glass		
Finish		Copper	
LED Driver	Meanwell PCD-16-350B		
	200-240 VAC	0.20 A	50/60 Hz
	277 VAC	0.15 A	50/60 Hz
	Max. 40 W		
	Tronic dimmable, casambi dimmer suggested.		
			IP20

FEATHER CHANDELIER

Light Source *every bulb	Led 12 W 2700 K 1200 lm CRI 80
Product use	Indoor
Dimensions	600 x 600 x 450 mm (l x w x h)
Versions	Large
Materials	Special Material : Copper Copper plated metal & sandblasted handblown glass. * Please note this item may naturally corrode in time. Material : Varnished metal Varnished metal (dark grey) & sandblasted handblown glass. Foot: Dark grey * Different color on request

Finish  Copper  Dark grey

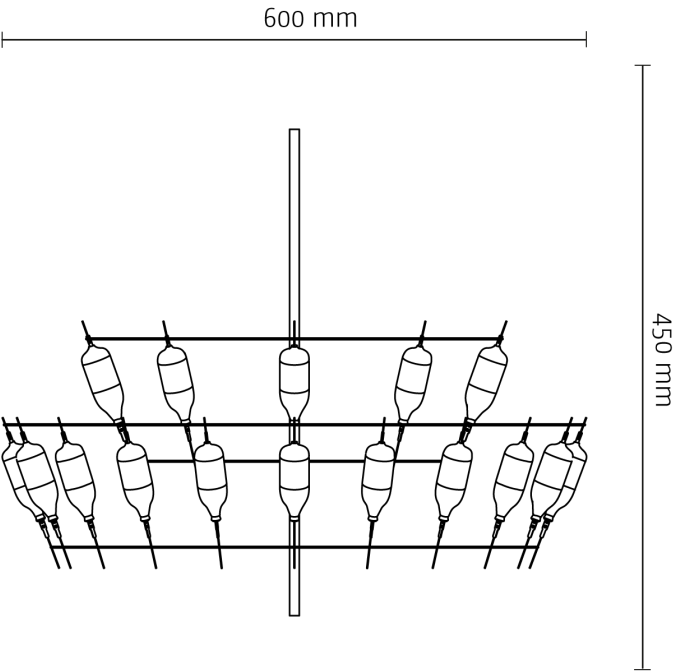

LED Driver	Meanwell PCD-16-350B
	200-240 VAC 0.20 A 50/60 Hz
	277 VAC 0.15 A 50/60 Hz
	Max. 40 W
	Tronic dimmable, casambi dimmer suggested.




FEATHER TABLE LIGHT

Light Source *every bulb	Led 12 W 2700 K 1200 lm CRI 80
Product use	Indoor
Dimensions	200 x 200 x 700 mm (l x w x h)
Versions	Table light
Materials	Special Material : Copper Copper plated metal & sandblasted handblown glass. * Please note this item may naturally corrode in time. Material : Varnished metal Varnished metal (dark grey) & sandblasted handblown glass. Foot: Dark grey * Different color on request

Finish  Copper  Dark grey

LED Driver	Meanwell PCD-16-350B
	200-240 VAC 0.20 A 50/60 Hz
	277 VAC 0.15 A 50/60 Hz
	Max. 40 W
	Tronic dimmable, casambi dimmer suggested.
	  IP20

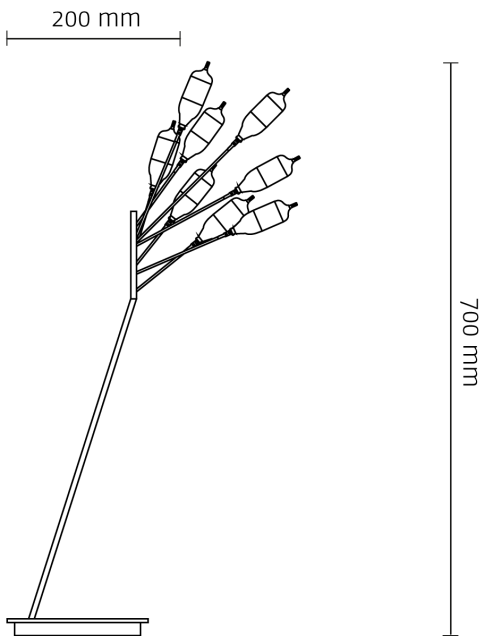



EXPLODED VIEW

collection 2014




Do we understand what happens when we dim our lights? How can we include dimming as a part of the design? These are some of the questions that triggered the design of Exploded View, a series of lighting objects that incorporate movement as a key element of its design.



By moving the light-source away from, or closer to the lighting object, the intensity of the light can be adapted. After all, the sun never fades; it is the earth that moves closer and further away, causing the light to reflect, change colour, dim or die.








LUNAR


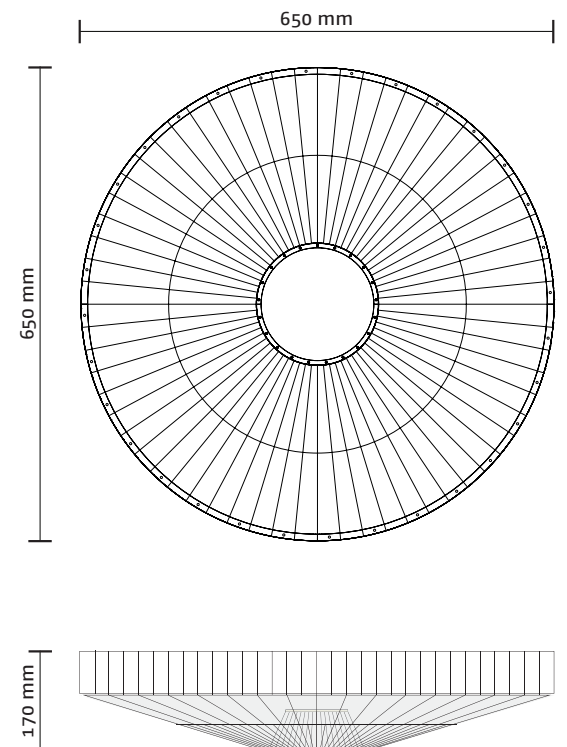

Light Source	Led 12 W 2700 K 1200 lm CRI 80
Product use	Indoor
Dimensions	150 x 650 x 650 mm (l x w x h)
Materials	Cuttet and coated steel, acrylic
LED Driver	Meanwell PCD-16-350B 200-240 VAC 0.20 A 50/60 Hz 277 VAC 0.15 A 50/60 Hz Max. 40 W Tronic dimmable, casambi dimmer suggested   
Canopy	Full swing - 12 x 8,5 cm








ECLIPSE

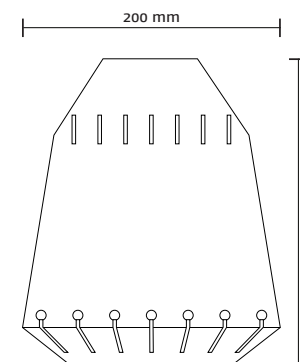
Light Source	Led 12 W 2700 K 1200 lm CRI 80		
Product use	Indoor		
Dimensions	200 x 200 x 250 mm (l x w x h)		
Materials	Cutted and coated steel		
LED Driver	Meanwell PCD-16-350B		
	200-240 VAC	0.20 A	50/60 Hz
	277 VAC	0.15 A	50/60 Hz
	Max. 40 W		
	Tronic dimmable, casambi dimmer suggested		
	<div><div></div><div></div><div></div></div>		
Canopy	Full swing - 12 x 8,5 cm		





LUNAR wall

Light Source	Led 12 W		
	2700 K		
	1200 lm		
	CRI 80		
Product use	Indoor		
Dimensions	150 x 650 x 650 mm (l x w x h)		
Materials	Cuttet and coated steel, acrylic		
LED Driver	Meanwell PCD-16-350B		
	200-240 VAC	0.20 A	50/60 Hz
	277 VAC	0.15 A	50/60 Hz
	Max. 40 W		
	Tronic dimmable, casambi dimmer suggested		
<div><div></div><div></div><div></div></div>			

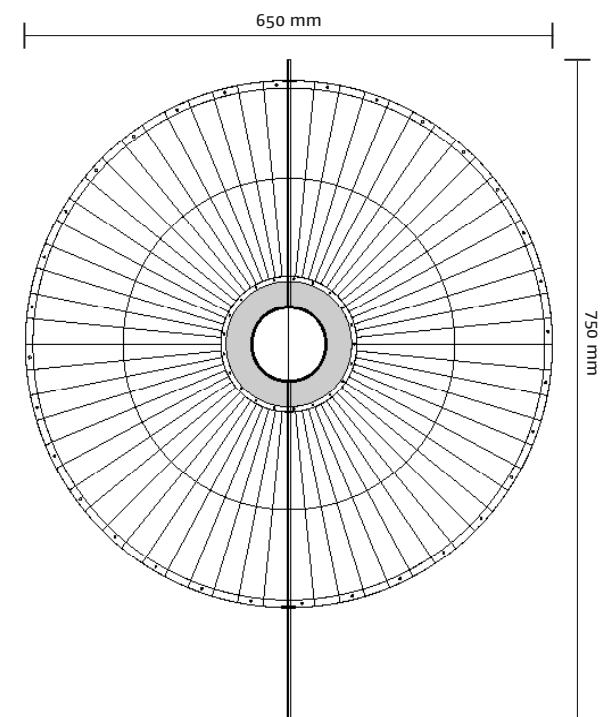


PASSAGE COLLECTION

collection 2017

Esther Jongsma graduated from the Design Academy Eindhoven with her work 'Passage' in 2013. In this collection, old and new techniques meet. The traditional craft of patterned wooden floors and wood inlaying is translated to the modern technique of laser cutting. Initially, the 'Passage Collection' included a carpet and a room divider. Later, the collection expanded with a table, side table and a plateau.

The intricate pattern and design of 'Passage Table' is timeless. The tabletop consists of a wooden inlaid, graphical pattern, and is finished with a smooth satin gloss. The table is supported by solid, metal legs with a-centric feet resulting in a slightly lighter base that can be easily deconstructed.

Additionally, the table can be requested with a plain, white oak tabletop without graphical pattern for those who prefer a more simple design.

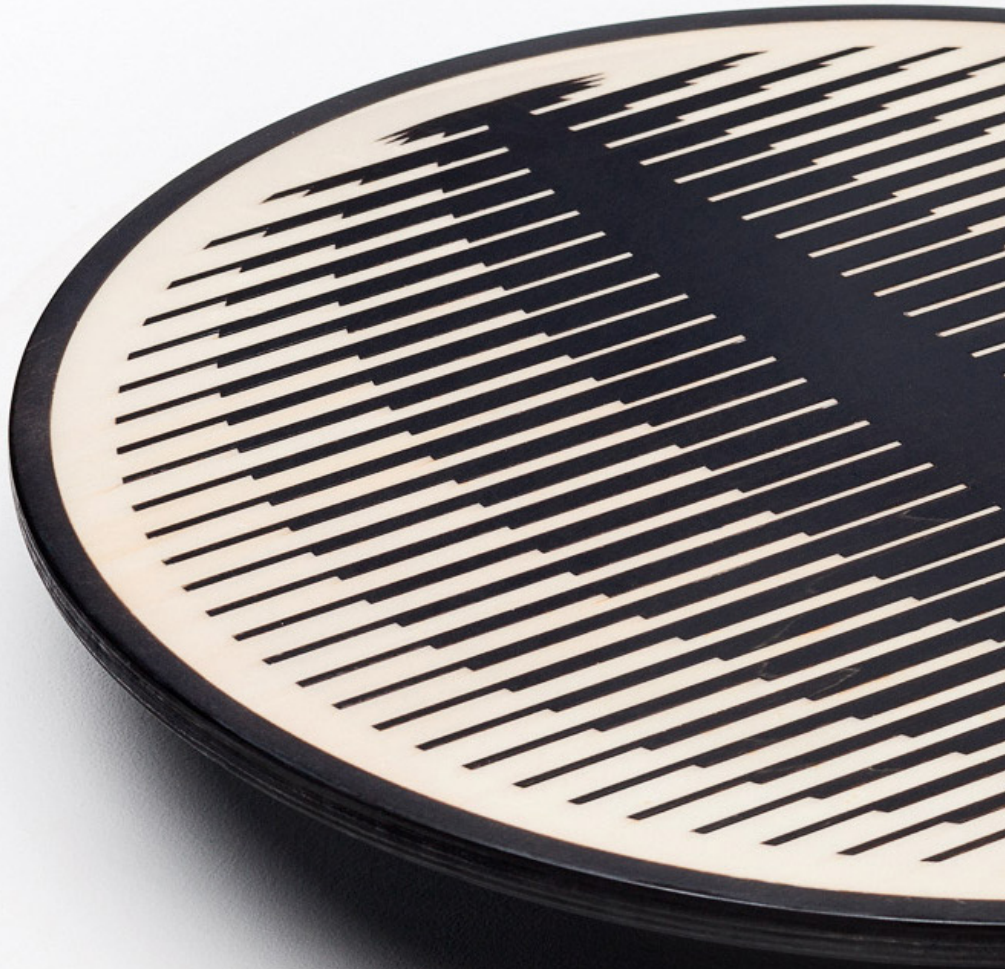





< **Passage** *table small*
> **Passage** *tray*






Passage carpet


PASSAGE SIDETABLE


Product use	Indoor
Dimensions	450 x 450 x 20 mm (l x w x h)
Colors	White - Blue border, Blue legs Blue - White border, White legs White - Brown border, Brown legs Brown - White border, White legs White - Black border, Black legs Black - White border, White legs
Materials	Inlayed plywood, plywood
Finish	Coating

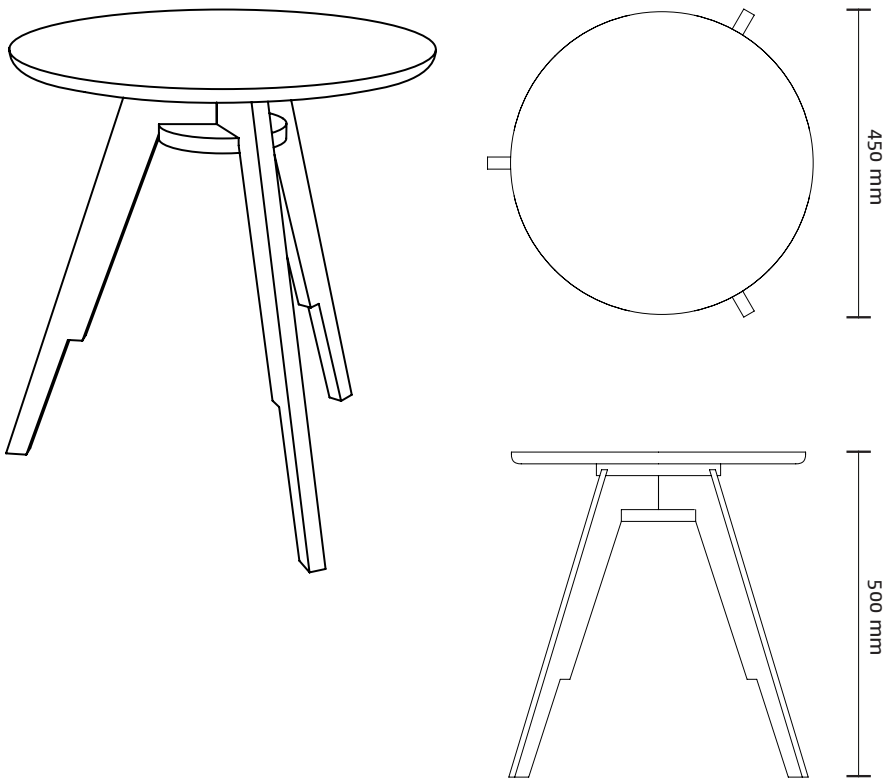

PASSAGE PLATEAU

Product use	Indoor
Dimensions	450 x 450 x 500 mm (l x w x h)
Colors	White - Blue border Blue - White border White - Brown border Brown - White border White - Black border Black - White border
Materials	Inlayed plywood, plywood
Finish	Coating

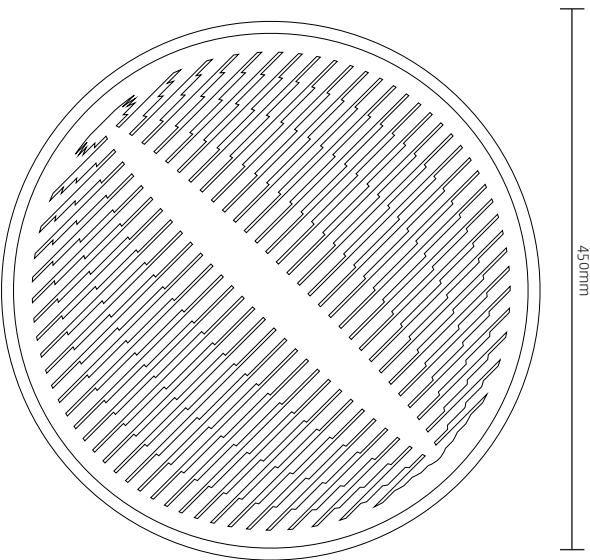

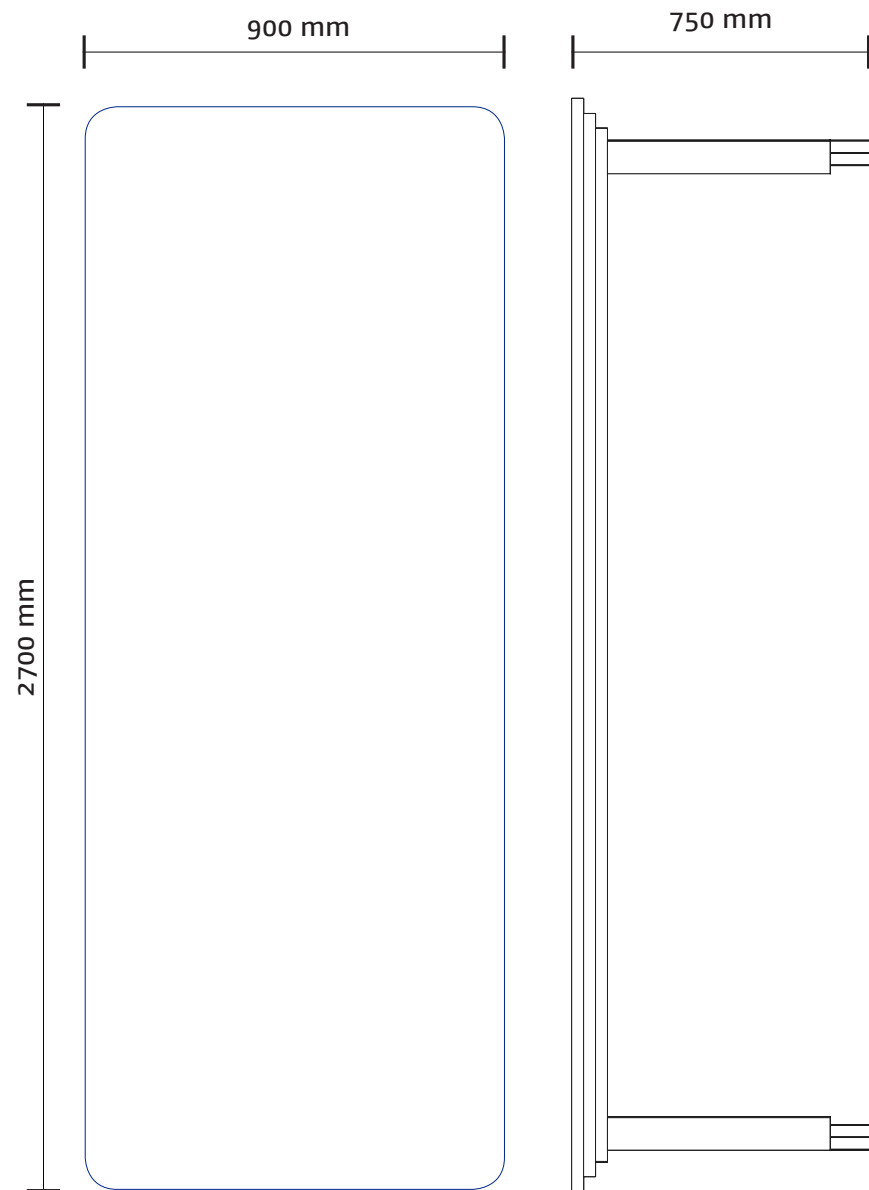

PASSAGE TABLE

Product use	Indoor
Dimensions	270 x 90 x 75 (l x w x h)
Colors	Neutral - Black (inlayed pattern) Neutral - Blue (inlayed pattern) Neutral - Brown (inlayed pattern) Plain Oak (no pattern)
Materials	Inlayed plywood, plywood
Finish	Coating